


– Wave goodbye to boring lighting!

Spectral®

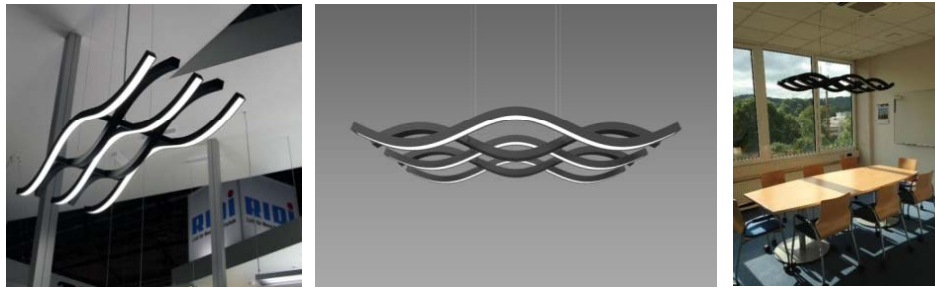


**Sinus** takes its inspiration from sinusoidal wave forms and its smooth undulations result in an elegant sculptural fitting, perfect for areas requiring a feature piece that doesn't compromise on performance or efficiency. The five flowing profiles rise and fall side-by-side and combine three downlight and two uplight runs, creating the wave-like structure. Each of the five profiles act as a heatsink for the 120 LEDs, which are mounted along the runs. **Sinus** has a combined output of 6500lm and is suspended by Spectral's trademark cabling which doubles up as the power supply. The extruded aluminium body acts as a thermal control to the LED's keeping the temperature constant and the output to an optimum. Multiple permutations available and custom colours upon request. RGB, Mono, DALI dimmable.

### Technical Data

Power: 9.6 W/m  
CRI Colour Rendering Index: 85+  
Lumen Output: 800 lm/m  
Efficiency: 81 lm/W  
IP rating: IP20  
Diffuser: Opal PMMA  
Body: Aluminium extrusion  
Finish: Any RAL  
Control: DALI dimmable version available  
Power supply: 24 V mounted in rose

### Dimensions

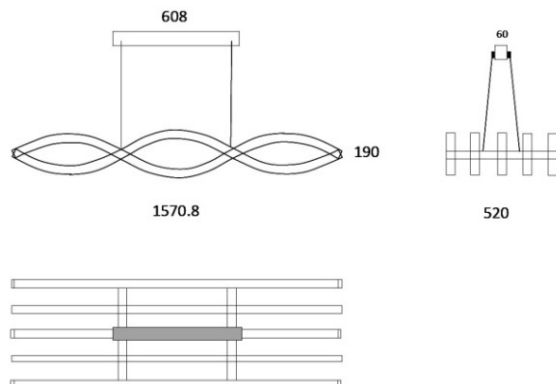

Don't hesitate to contact our experts: Mónika Hosó (T: (06 1) 450 2701); István Hajdrik (T: (06 1) 450 2712); Balázs Lévai (T: (06 1) 450 2711); György Jánoska (T: 06 1) 450-2714)