


– Wave goodbye to boring lighting!

Spectral®

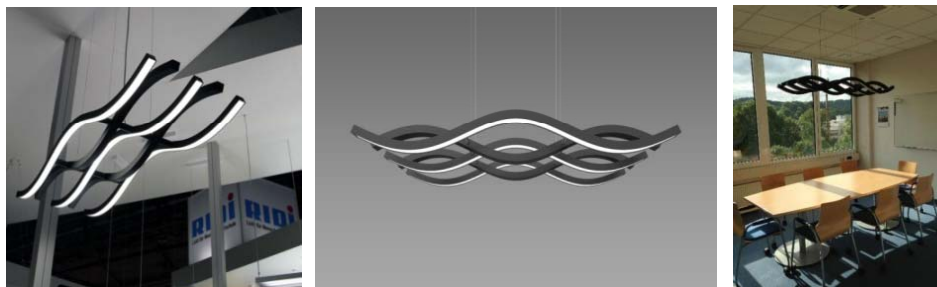


Sinus takes its inspiration from sinusoidal wave forms and its smooth undulations result in an elegant sculptural fitting, perfect for areas requiring a feature piece that doesn't compromise on performance or efficiency. The five flowing profiles rise and fall side-by-side and combine three downlight and two uplight runs, creating the wave-like structure. Each of the five profiles act as a heatsink for the 120 LEDs, which are mounted along the runs. **Sinus** has a combined output of 6500lm and is suspended by Spectral's trademark cabling which doubles up as the power supply. The extruded aluminium body acts as a thermal control to the LED's keeping the temperature constant and the output to an optimum. Multiple permutations available and custom colours upon request. RGB, Mono, DALI dimmable.

Technical Data

Power: 9.6 W/m
CRI Colour Rendering Index: 85+
Lumen Output: 800 lm/m
Efficiency: 81 lm/W
IP rating: IP20
Diffuser: Opal PMMA
Body: Aluminium extrusion
Finish: Any RAL
Control: DALI dimmable version available
Power supply: 24 V mounted in rose

Dimensions

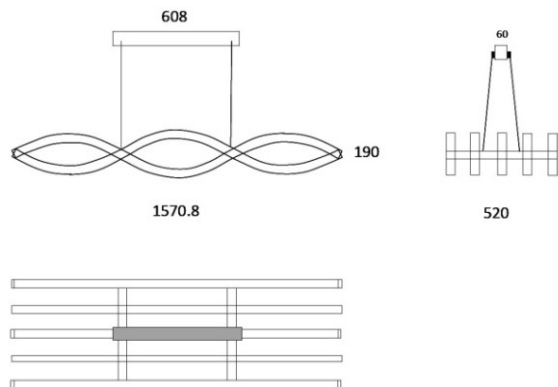

Don't hesitate to contact our experts: Mónika Hosó (T: (06 1) 450 2701); István Hajdrik (T: (06 1) 450 2712); Balázs Lévai (T: (06 1) 450 2711); Miklós Bükkös (T: (06 1) 450 2714)